

## GOOF RING

### CUSTOMER PROJECT

Project: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Cat. No.: \_\_\_\_\_  
 Qty: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 EEL Rep: \_\_\_\_\_



Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

### PRODUCT DESCRIPTION

Goof rings enable the fixture to fit in a slight larger hole on the ceiling and help reduce the cost by using the existing hole. The UTLED Goof Ring series will fit most Ultrathin fixtures. There are 3 sizes- 4 inch, 6 inch, and 8 inch.

### SPECIFICATIONS FEATURES

#### Construction


Round zinc plated steel ring

#### Mounting


Snap fixture in opening with attached spring clips or friction blades

#### Finish


White electrostatic plastic powder coating finish

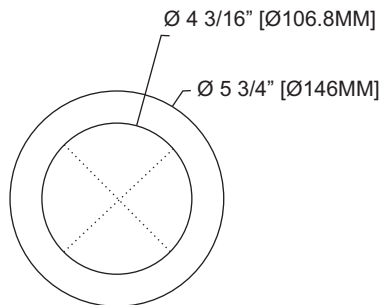

**UTLED-4-GOOF RING**  
 Inside Diameter - 4 3/16" (106.8mm)  
 Outside Diameter- 5 3/4 (146mm)  
 Thickness- 1mm - 1.3mm

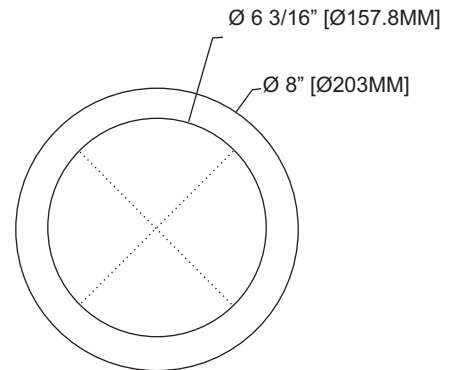

**UTLED-6-GOOF RING**  
 Inside Diameter - 6 3/16" (157.8mm)  
 Outside Diameter- 8" (203mm)  
 Thickness- 1mm - 1.3mm

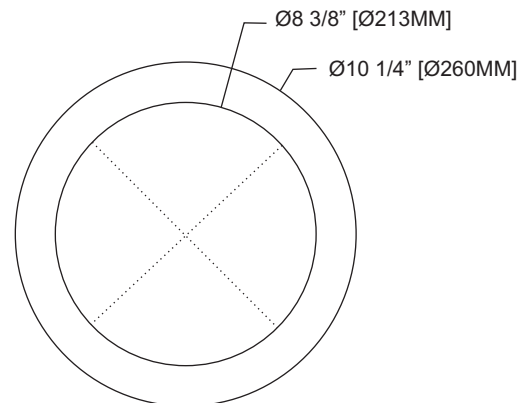

**UTLED-8-GOOF RING**  
 Inside Diameter - 8 3/8" (213mm)  
 Outside Diameter- 10 1/4" (260mm)  
 Thickness- 1mm



**SPECIFICATION SHEET**  
**CONTINUED**

Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

**EEL FIXTURE WITH GOOF RING COMPATIBILITY LIST**

	<b>4" Model</b>	<b>6" Model</b>	<b>8" Model</b>
<b>BELED</b>	Y	N/A	N/A
<b>BERLED</b>	N/A	N/A	N/A
<b>MULED</b>	Y	N/A	N/A
<b>RF-UTLED</b>	N	Y	N/A
<b>RLALED</b>	N/A	N/A	N/A
<b>RLBLED</b>	Y	Y	N/A
<b>RLO-R4</b>	Y	N/A	N/A
<b>RLO-R6</b>	N/A	Y	N/A
<b>UJLED</b>	Y	Y	N/A
<b>UTLED</b>	Y	Y	Y
<b>UTP-R4</b>	Y	N/A	N/A
<b>UTP-R6</b>	N/A	Y	N/A
<b>UTP-R8</b>	N/A	N/A	Y

**Note:**

1. For the 4" goof ring and 6" goof ring, the maximum holes they can fit are 5 7/8" and 7 7/8" (all measurements are diameter), respectively;
2. For the 8" goof ring, the maximum hole they can fit is 9 1/2" (diameter);
3. For any holes that are larger than the ones said in 1. a corresponding mounting plate must be used or a fixture model with upper size is recommended (if applicable);
3. Silicone glue must be applied between the goof ring and the mounting surface to provide proper seal.