

SUBJECT SPECIFICATION SHEET

CM-354 ABS White

CUSTOMER PROJECT

Project: _____
 Type: _____
 Cat. No.: _____
 Qty: _____
 Date: _____
 EEL Rep: _____



Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

DESCRIPTION

This Running Man Exit Sign is constructed of thermal plastic housing and polycarbonate (PC) pictogram sign. Remote lamp head can be rotated to desired angle. It is suitable for wall mounting, side mounting and ceiling mounting.

SPECIFICATION FEATURES

Construction

- ABS Housing (UL94V-0 Flame Rating)
- PC Pictogram
- Two fully adjustable glare-free LED heads

Mounting

- Housing snaps to canopy
- Simple twist and lock will tightly secure to the housing

Controls

- LED Indicator light and push button test switch
- LED's mounted on printed circuit board (PCB)

Finish

- White

Warranty

- 3-Year Warranty

Face Options

- Single or double face
- 3 pictograms: no directional indicator, left facing directional indicator and right facing directional indicator



Compliance

- Suitable for damp locations
- cULus listed (UL 924)
- The basic standard used to investigate products that are UL 1598 ("Luminaires") certified, also conforms to CSA-C22.2 No. 250.0 ("Luminaires").



CM-354 ABS WHITE

CM Series

Wattage(s) 4W

Voltage 120-347V


Hz 60

CCT 6500K

Battery Type Ni-Cad 3.6V

Operating Temperature 0°C to 40°C

Input Current 0.04A

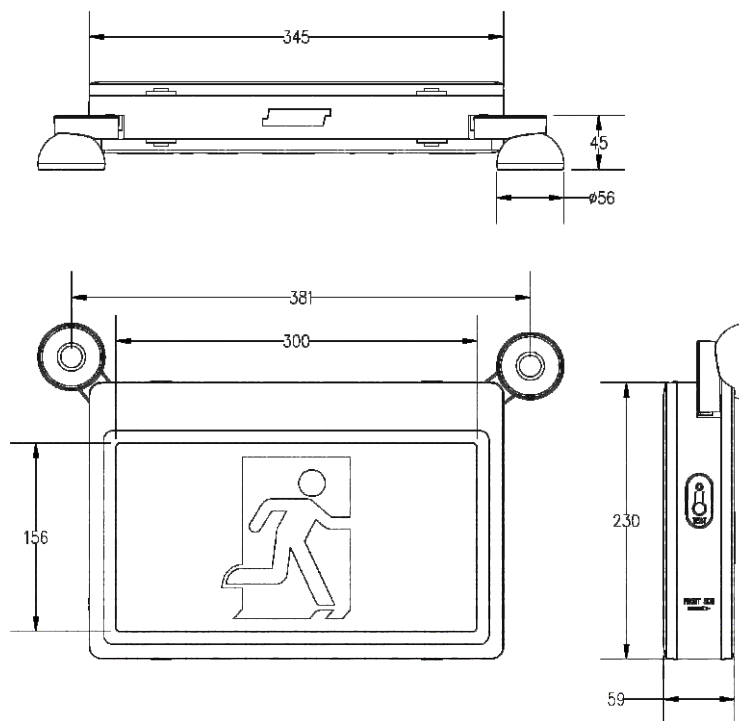

ORDERING CODE, ENERGY AND PERFORMANCE DATA

	Model No.	Voltage (V)	Charge Time	Emergency Luminance Flux under 3.6V / 12V / 24V	Largest Emergency Luminance Flux	Lamp Head	Discharge Time	Certification
	CM-354 ABS White	120-347	24 hours	120	120	2W x 2pcs	>120 minutes	cULus LISTED